# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Kingfisher Int. Prod. B.V.

**Supplier's address:** Marcus Muktarsingh, Rapenburgerstaat 175E, 1011VM Netherlands Amsterdam, NL

**Model identifier:** 5063022860866

**Type of light source:**

| | | | |
|---|---|---|---|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E14, 220-240V~50Hz | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | No |

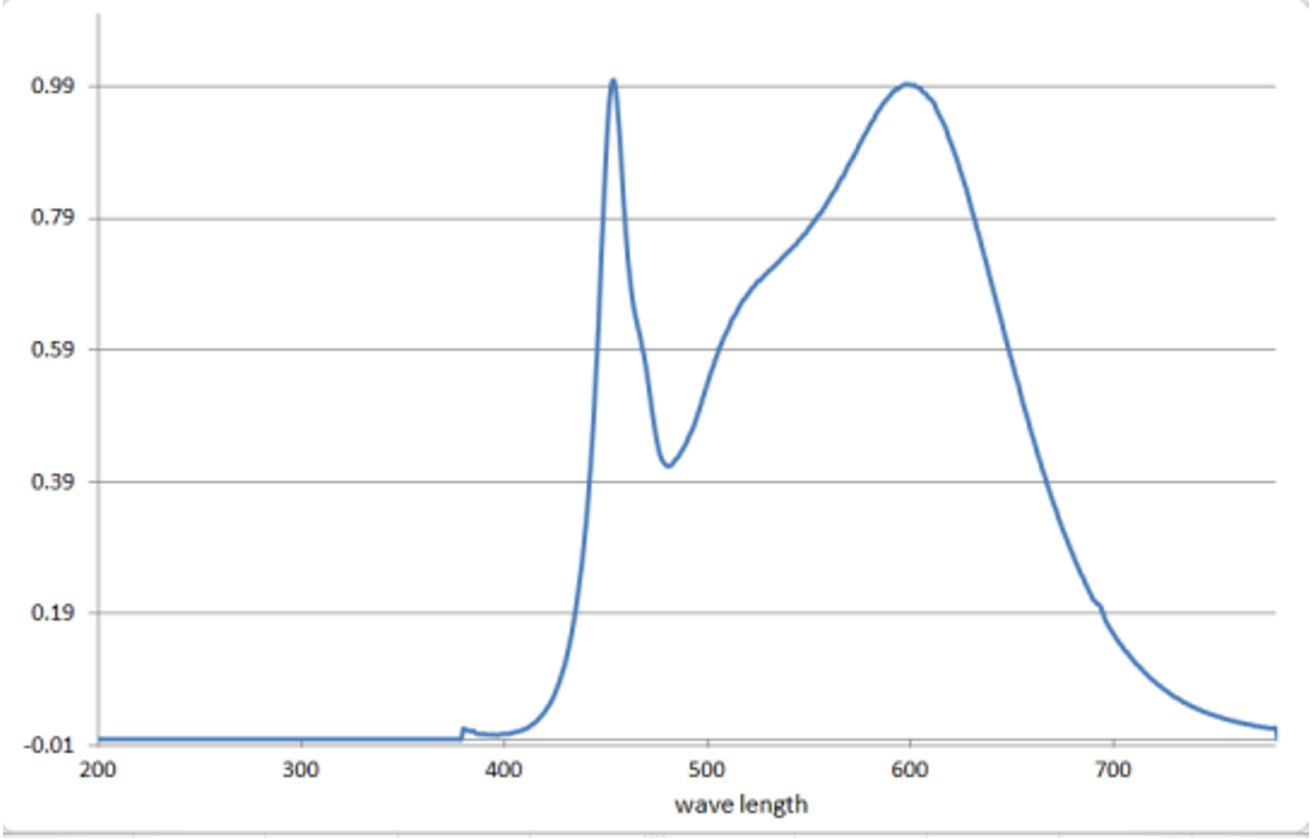
**Product parameters**

| Parameter | | Value | Parameter | Value |
|---|---|---|---|---|
| **General product parameters:** | | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | | 2 | Energy efficiency class | D |
| Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º) | | 250 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 |
| On-mode power ($P_{on}$), expressed in W | | 1,8 | Standby power ($P_{sb}$), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power ($P_{net}$) for CLS, expressed in W and rounded to the second decimal | | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 80 |
| Outer dimensions without separate control gear, light- | Height | 82 | Spectral power distribution in the range 250 nm to 800 nm, at full-load | See image in last page |
| | Width | 45 | | |
| | Depth | 45 | | |

| | | | | |
|---|---|---|---|---|
| ing control parts and non-lighting control parts, if any (millimetre) | | | | |
| Claim of equivalent power[a] | | Yes | If yes, equivalent power (W) | 25 |
| | | | Chromaticity coordinates (x and y) | 0,382<br>0,380 |
| **Parameters for LED and OLED light sources:** | | | | |
| R9 colour rendering index value | | 0 | Survival factor | 0,90 |
| the lumen maintenance factor | | 0,96 | | |
| **Parameters for LED and OLED mains light sources:** | | | | |
| displacement factor (cos ϕ1) | | 0,00 | Colour consistency in McAdam ellipses | 6 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | | -[b] | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | | 1,0 | Stroboscopic effect metric (SVM) | 0,4 |

[a] '-' : not applicable;

[b] '-' : not applicable;


0.99
0.79
0.59
0.39
0.19
-0.01
200
300
400
500
600
700
wave length

| | |
|---|---|
| **EPREL registration number:** 2521621<br><br>Model placed on the Union market from 05/03/2026. | https://eprel.ec.europa.eu/qr/2521621 |

**Supplier:** Kingfisher International Products B.V. (Manufacturer) **Website:**

**Customer care service:**

**Name:** Marcus Muktarsingh **Website:** www.kingfisher.com

**Email:** Marcus.Muktarsignh@kingfisher.com **Phone:** +44 7774 016346

**Address:**
Rapenburgerstaat 175E
1011VM Amsterdam
Netherlands